

Eldridge Products, Inc.

Gas Mass Flow Measurement & Control Instrumentation



Master-Touch™




Series 9800MP Flow Averaging Tubes



Eldridge Products, Inc.'s patented* Flow Averaging Tubes (FAT™) provide accurate flow measurement in large pipes and ducts without the expense and complexity of traditional multipoint systems, and are well suited to most applications with limited available straight run.

The Master-Touch FAT™ probes utilize a flow averaging tube to give a stable flow signal in applications where the flow profile is less than ideal, such as downstream of a bend, valve, tee or obstruction. In most installations, the up-stream straight run can be as short as three diameters. The FAT™ probe has a number of large diameter (0.125") inlet ports along the length of the upstream impact surface. The impact pressure at each inlet port is averaged inside the tube to create the axial flow through the tube and across our flow sensor. The gas returns to the main flow stream through the ports located near the sensing elements.

Anomalies in the actual flow profile or installations in non-circular ducts may require minor adjustments for the best accuracy. The velocity impact pressure follows a square root function. Therefore, the average velocity pressure in the FAT™ probe may vary slightly from the average of the velocities at each inlet port. The Master-Touch software supports three methods of flow signal adjustments for superior accuracy.

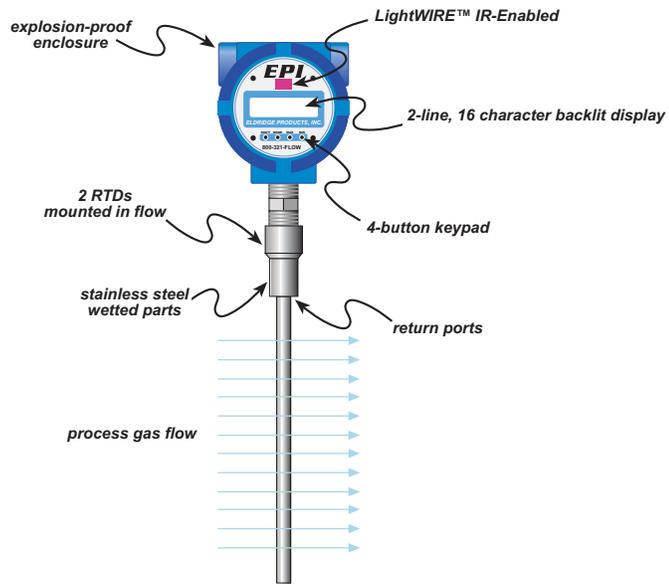

INSERTION style Flow Averaging Tubes include an inlet probe assembly which is inserted into the process gas flow conduit to allow the gas to flow into the tube and up across the flow sensing elements before returning to the process line. Our insertion style flowmeters are available with 1/2", 3/4" or 1" OD inlet tubes (the flow return port is 1/2" larger for each size). Installation requires a properly-sized bored through tube fitting. Tube fittings and ball valve retractor assemblies, with or without a mounting flange, are also available from the factory as options. The tube length is determined by the pipe or duct ID upon ordering.

INTEGRAL style thermal mass flow meters have all of the electrical components and connections located within one enclosure. The enclosure is explosion-proof cast aluminum NEMA 4X. The enclosure is mounted directly to the inline flow section or to the insertion probe assembly at the point of measurement.

TYPICAL APPLICATIONS FOR MASTER-TOUCH™ FLOWMETERS:

AUTOMOTIVE INDUSTRY Compressed Air monitoring * Natural Gas consumption * Powder paint air flow
* Paint booth/paint oven ventilation

UTILITY SERVICES Stack or Flue Gas * Wastewater aeration * Ventilation systems * Digester Gas * Gas flows * Nitrogen purge * Combustion air * Boiler inlet air


FOOD PROCESSING Drying air * Ventilation systems * Boiler inlet air * Exhaust gas * Process control * Compressor lines * HVAC Air balancing * Duct flows * Energy conservation * Fume hoods * Cleanrooms * Laminar flow benches

LABORATORY AND R & D Flow research * Biomedical studies * University studies * Toxicology studies * Energy studies * Industrial Hygiene * Occupational Safety * Experimentation

PETROLEUM & GAS INDUSTRIES Custody transfer * Landfill Gas recovery * Flare Gas measurement * Gas mixing * Gas quality studies * Leak testing

RAW MATERIALS INDUSTRIES Pulp & Paper mills * Mining * Semiconductor manufacturing * Chemical processing * Primary metals * Plastics & synthetics

*U. S. Patent No. 6,883,389 Other U.S. & foreign patents pending

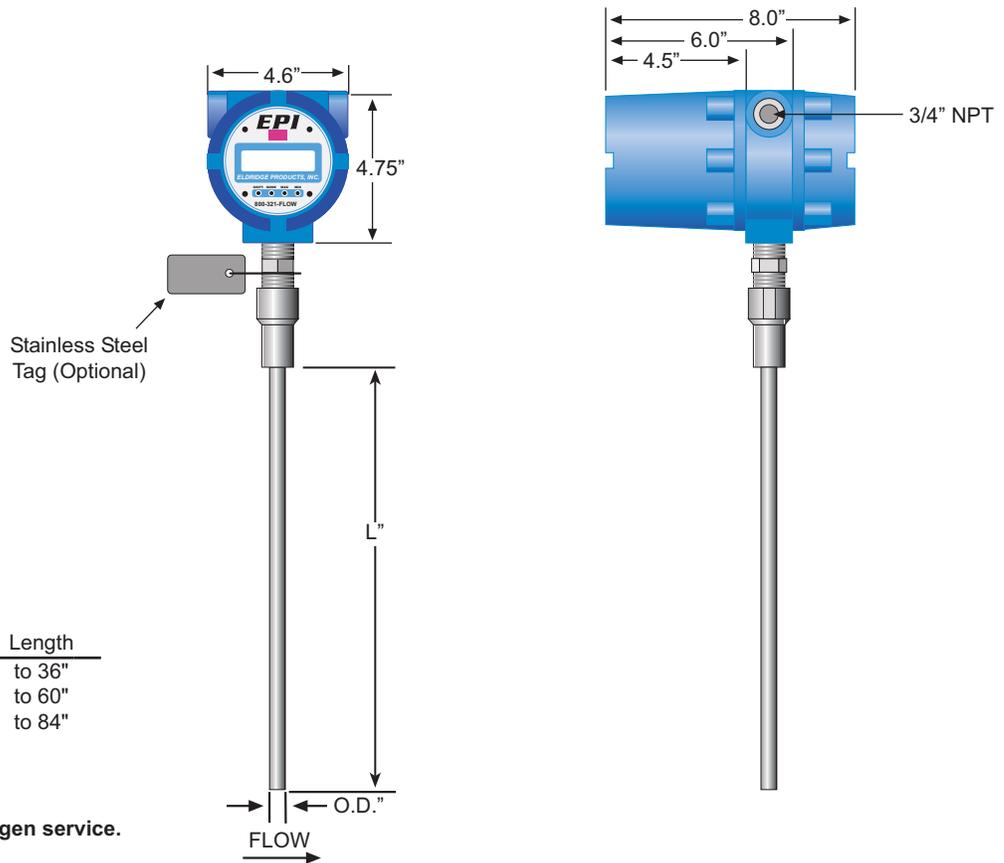

Model Number	O.D.	Length
9840MP	1/2"	to 36"
9860MP	3/4"	to 60"
9880MP	1"	to 84"



Not available for Oxygen service.

SPECIFICATIONS

Linear signal output

Relay Output

Signal Interface

Accuracy including linearity (Ref.: 21°C):

Repeatability

Sensor response time

Turn down ratio

Electronics temperature range

Gas temperature range

Gas temperature effect

Gas pressure effect

Pressure rating maximum:

Insertion flowmeters (See note below)

Insertion probe PSI assumes proper installation with stainless steel ferrule. Teflon ferrules are not acceptable. Above the listed pressure, flange-mounting is required to eliminate the potential of the probe being forced out of the line during installation or removal under pressure.

Transmitter power requirements

RAM Back-up

Wetted materials:

Standard temperature & pressure (STP)

(Air .075 lb/cubic foot)

NIST traceable calibration

0-5 VDC & 4-20 mA

Two 1-amp, user-selectable alarm functions

RS232 & RS485 Modbus RTU

± (1% of Reading + [0.5% + .05%/°C of Full Scale])

± 0.2% of Full Scale

1 second (time constant per step change)

100:1 (50 SCFM/FT² minimum Reading)

-40°-85°C (-40°-185°F)

0°-66°C (32°-150°F)

0.02% /°C

Negligible over +/- 20% of absolute calibration pressure

225 PSI Std., >225 special

5 Watts or less

Lithium Battery

316SS, including sensor

70° F & 29.92" Hg

Standard

APPROVALS

MP Series Flow Transmitter — For use in hazardous area locations: Class I Division 1 Groups B, C and D; Class II E, F and G; Class III; Type 4X; Ex d IIB + H2; AEx d IIB + H2, IP66; EEx d IIB + H2, IP66; T2 (consult factory for T3 or T4).

Certified to US requirements; Certified to Canadian requirements

Certified to European ATEX requirements


* The accuracy specification applies to the instrument only. EPI is not responsible for measurement errors due to flow profile irregularities caused by installation piping configurations, corrosion on inner pipe surfaces, valve placement, etc.

ACCESSORIES



Light WIRE™

The LightWIRE™ Communicator I modules transmit and receive signals from LightWIREIR-Enabled flowmeters. When connected to a RS232 or USB port on a PC or laptop running EPI Communicator software, the LightWIRE Communicator I module replaces the three-wire cable for communications with an IR-Enabled Master-Touch™ flowmeter. The LightWIRE Communicator II hand-held module is a substitute for the keypad/display assembly of IR-Enabled Master-Touch™ flowmeters. Access all of the flowmeters functions without removing the flowmeter's enclosure cover with the Communicator II module.

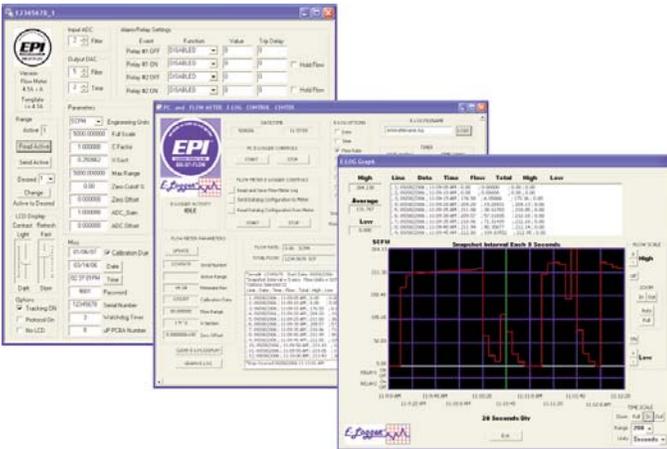

E-logger™

The E-Logger™ module of the free EPICommunicator™ software is a fully functional, PC-based data logger that works in conjunction with Master-Touch™ flowmeters which have v4.1A or higher software. The user can select from a set of categories for the data collection, the time interval for each data "snapshot" and, if necessary, programmed start and stop times. The data is stored on either the flowmeter or a PC. E-Logger will also graph the data, and it provides tools for analysis of the data. Data files stored on a PC can be accessed by most common spreadsheet applications.

LIMITED WARRANTY

Eldridge Products, Inc. (EPI) warrants its products to be free from defects in materials and workmanship for one year from the date of factory shipment. If there is a defect, the purchaser must notify EPI of the defect within the warranty period. Upon receipt of the defective product, EPI will either repair or replace the defective product at its sole option and at no cost to the purchaser. EPI MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AS TO THE PRODUCTS. EPI MAKES NO WARRANTY THAT THE GOODS SOLD TO ANY PURCHASER ARE FIT FOR ANY PARTICULAR PURPOSE. FURTHERMORE, EPI MAKES NO WARRANTY OF MERCHANTABILITY WITH RESPECT TO ANY PRODUCTS SOLD TO ANY PURCHASERS. There are no other warranties that extend beyond the description on any brochure or price quote.

LIMITED ACCEPTANCE

Acceptance of any offer is limited to its terms. Acceptances or confirmations that state additional or differing terms from this price quote shall be operative as acceptances, but all additional or differing terms shall be deemed material alterations within the meaning of Commercial Code Section 2207(2)(b), and notice of objection to them pursuant to Commercial Code Section 2207(2)(c) is hereby given. The laws of the State of California govern this contract and venue is Monterey County. Risk of loss passes F.O.B. EPI factory. Payment due in full in US Dollars within credit terms granted from factory shipment. Additional fees shall include interest on unpaid balances that are outstanding for more than granted credit terms, plus all collection costs and attorneys' fees incurred in collecting any outstanding balance. Any and all additional or differing terms do not become part of the contract between EPI and any purchaser. The terms of any offer are expressly limited to the terms detailed in any product brochure or price quote. Any modification to any of the terms of this offer must be in writing and must be signed by an officer of EPI.



Eldridge Products, Inc.

2700 Garden Road, Building A, Monterey, CA 93940
TF: 800.321.FLOW (3569) PH: 831.647.7777 FX: 831.648.7780
www.epiflow.com — sales@epiflow.com

Eldridge Products, Inc.

Gas Mass Flow Measurement & Control Instrumentation

Master-Touch™




Series 9700MP Flow Averaging Tubes



Eldridge Products, Inc.'s patented* Flow Averaging Tubes (FAT™) provide accurate flow measurement in large pipes and ducts without the expense and complexity of traditional multipoint systems, and are well suited to most applications with limited available straight run.

The Master-Touch FAT™ probes utilize a flow averaging tube to give a stable flow signal in applications where the flow profile is less than ideal, such as downstream of a bend, valve, tee or obstruction. In most installations, the up-stream straight run can be as short as three diameters. The FAT™ probe has a number of large diameter (0.125") inlet ports along the length of the upstream impact surface. The impact pressure at each inlet port is averaged inside the tube to create the axial flow through the tube and across our flow sensor. The gas returns to the main flow stream through the ports located near the sensing elements.

Anomalies in the actual flow profile or installations in non-circular ducts may require minor adjustments for the best accuracy. The velocity impact pressure follows a square root function. Therefore, the average velocity pressure in the FAT™ probe may vary slightly from the average of the velocities at each inlet port. The Master-Touch software supports three methods of flow signal adjustments for superior accuracy.

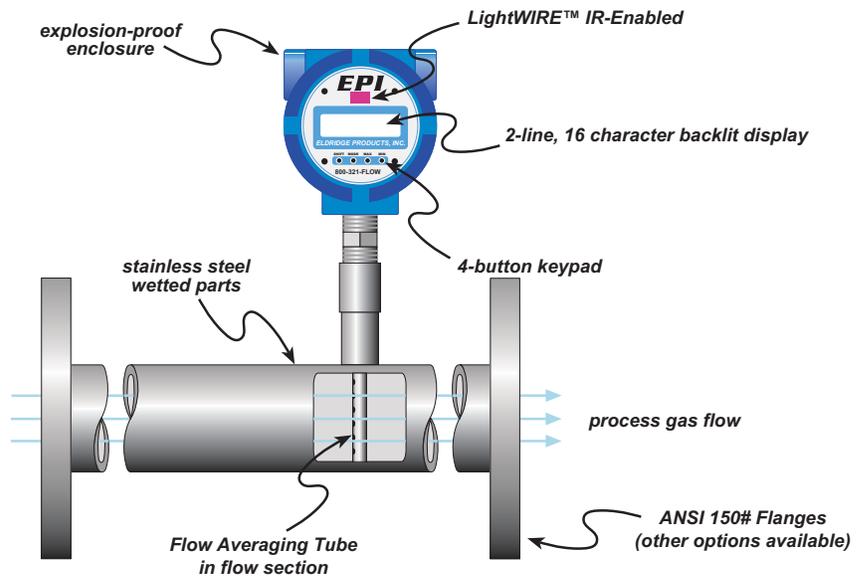

INLINE style thermal Flow Averaging Tubes have a flow section that is usually specified to match the user's flow conduit. It is plumbed directly into the process line. The standard design includes ANSI 150 # flanges and our flow straightening plates. Upstream straight run requirements can be reduced to a little as three diameters with this design. Our Inline style Flow Averaging Tubes are available in sizes from 2" pipe through 6" pipe (consult factory for larger sizes).

INTEGRAL style thermal mass flow meters have all of the electrical components and connections located within one enclosure. The enclosure is explosion-proof cast aluminum NEMA 4X. The enclosure is mounted directly to the inline flow section or to the insertion probe assembly at the point of measurement.

TYPICAL APPLICATIONS FOR MASTER-TOUCH™ FLOWMETERS:

AUTOMOTIVE INDUSTRY Compressed Air monitoring * Natural Gas consumption * Powder paint air flow
* Paint booth/paint oven ventilation

UTILITY SERVICES Stack or Flue Gas * Wastewater aeration * Ventilation systems * Digester Gas * Gas flows * Nitrogen purge * Combustion air * Boiler inlet air

FOOD PROCESSING Drying air * Ventilation systems * Boiler inlet air * Exhaust gas * Process control * Compressor lines * HVAC Air balancing * Duct flows * Energy conservation * Fume hoods * Cleanrooms * Laminar flow benches

LABORATORY AND R & D Flow research * Biomedical studies * University studies * Toxicology studies * Energy studies * Industrial Hygiene * Occupational Safety * Experimentation

PETROLEUM & GAS INDUSTRIES Custody transfer * Landfill Gas recovery * Flare Gas measurement * Gas mixing * Gas quality studies * Leak testing


RAW MATERIALS INDUSTRIES Pulp & Paper mills * Mining * Semiconductor manufacturing * Chemical processing * Primary metals * Plastics & synthetics

*U. S. Patent No. 6,883,389 Other U.S. & foreign patents pending

Model Number	Pipe Length*	Pipe Length*
9716MP	2"	14"
9720MP	2 1/2"	14"
9724MP	3"	14"
9732MP	4"	14"
9748MP	6"	14"

* Consult factory for special lengths

 **Not available for Oxygen service.**

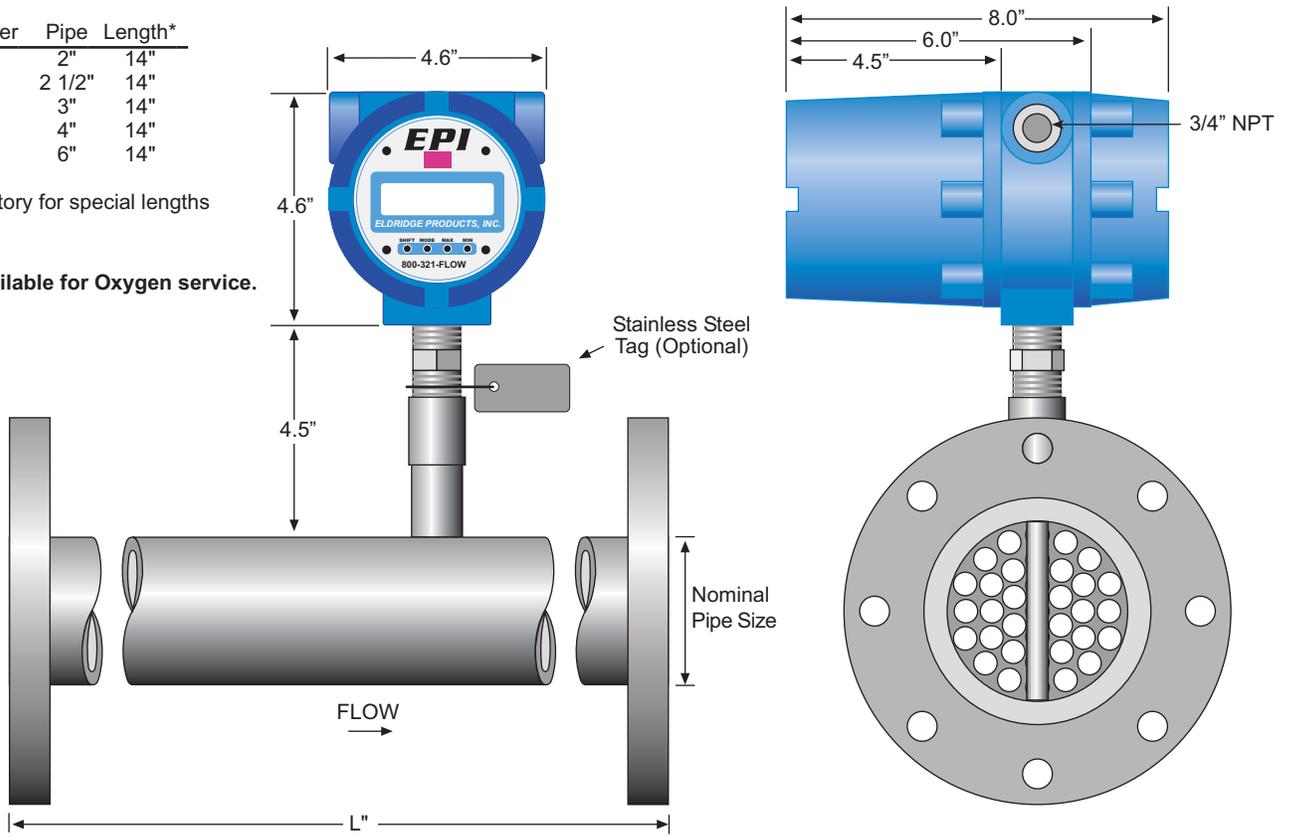

SPECIFICATIONS

Linear signal output

Relay Output

Signal Interface

Accuracy including linearity (Ref.: 21°C):

Repeatability

Sensor response time

Turn down ratio

Electronics temperature range

Gas temperature range

Gas temperature effect

Gas pressure effect

Pressure rating maximum:

Inline flowmeters

Transmitter power requirements

RAM Back-up

Wetted materials:

Standard temperature & pressure (STP)

(Air .075 lb/cubic foot)

NIST traceable calibration

0-5 VDC & 4-20 mA

Two 1-amp, user-selectable alarm functions

RS232 & RS485 Modbus RTU

± (1% of Reading + [0.5% + .05%/°C of Full Scale])

± 0.2% of Full Scale

1 second (time constant per step change)

100:1 (50 SCFM/FT² minimum Reading)

-40°-85°C (-40°-185°F)

0°-66°C (32°-150°F)

0.02% /°C

Negligible over +/- 20% of absolute calibration pressure

500 PSI Std., >500 special

5 Watts or less

Lithium Battery

316SS, including sensor

70° F & 29.92" Hg

Standard

APPROVALS

MP Series Flow Transmitter — For use in hazardous area locations: Class I Division 1 Groups B, C and D; Class II E, F and G; Class III; Type 4X; Ex d IIB + H2; AEx d IIB + H2, IP66; EEx d IIB + H2, IP66; T2 (consult factory for T3 or T4).

Certified to US requirements; Certified to Canadian requirements

Certified to European ATEX requirements


* The accuracy specification applies to the instrument only. EPI is not responsible for measurement errors due to flow profile irregularities caused by installation piping configurations, corrosion on inner pipe surfaces, valve placement, etc.

ACCESSORIES



Light **WIRE™**

The LightWIRE™ Communicator I modules transmit and receive signals from LightWIREIR-Enabled flowmeters. When connected to a RS232 or USB port on a PC or laptop running EPI Communicator software, the LightWIRE Communicator I module replaces the three-wire cable for communications with an IR-Enabled Master-Touch™ flowmeter. The LightWIRE Communicator II hand-held module is a substitute for the keypad/display assembly of IR-Enabled Master-Touch™ flowmeters. Access all of the flowmeters functions without removing the flowmeter's enclosure cover with the Communicator II module.

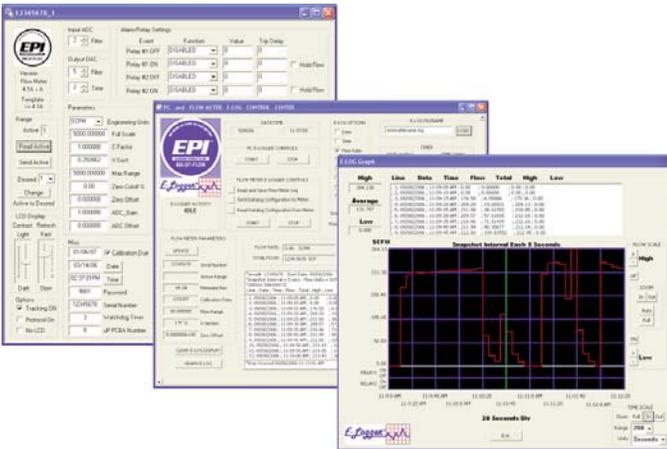

E-logger™

The E-Logger™ module of the free EPICommunicator™ software is a fully functional, PC-based data logger that works in conjunction with

Master-Touch™ flowmeters which have v4.1A or higher software. The user can select from a set of categories for the data collection, the time interval for each data "snapshot" and, if necessary, programmed start and stop times. The data is stored on either the flowmeter or a PC. E-Logger will also graph the data, and it provides tools for analysis of the data. Data files stored on a PC can be accessed by most common spreadsheet applications.

LIMITED WARRANTY

Eldridge Products, Inc. (EPI) warrants its products to be free from defects in materials and workmanship for one year from the date of factory shipment. If there is a defect, the purchaser must notify EPI of the defect within the warranty period. Upon receipt of the defective product, EPI will either repair or replace the defective product at its sole option and at no cost to the purchaser. EPI MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AS TO THE PRODUCTS. EPI MAKES NO WARRANTY THAT THE GOODS SOLD TO ANY PURCHASER ARE FIT FOR ANY PARTICULAR PURPOSE. FURTHERMORE, EPI MAKES NO WARRANTY OF MERCHANTABILITY WITH RESPECT TO ANY PRODUCTS SOLD TO ANY PURCHASERS. There are no other warranties that extend beyond the description on any brochure or price quote.

LIMITED ACCEPTANCE

Acceptance of any offer is limited to its terms. Acceptances or confirmations that state additional or differing terms from this price quote shall be operative as acceptances, but all additional or differing terms shall be deemed material alterations within the meaning of Commercial Code Section 2207(2)(b), and notice of objection to them pursuant to Commercial Code Section 2207(2)(c) is hereby given. The laws of the State of California govern this contract and venue is Monterey County. Risk of loss passes F.O.B. EPI factory. Payment due in full in US Dollars within credit terms granted from factory shipment. Additional fees shall include interest on unpaid balances that are outstanding for more than granted credit terms, plus all collection costs and attorneys' fees incurred in collecting any outstanding balance. Any and all additional or differing terms do not become part of the contract between EPI and any purchaser. The terms of any offer are expressly limited to the terms detailed in any product brochure or price quote. Any modification to any of the terms of this offer must be in writing and must be signed by an officer of EPI.



Eldridge Products, Inc.

2700 Garden Road, Building A, Monterey, CA 93940
TF: 800.321.FLOW (3569) PH: 831.647.7777 FX: 831.648.7780
www.epiflow.com — sales@epiflow.com

Eldridge Products, Inc.

Gas Mass Flow Measurement & Control Instrumentation

Master-Touch™




Series 9200MP Flow Averaging Tubes



Eldridge Products, Inc.'s patented* Flow Averaging Tubes (FAT™) provide accurate flow measurement in large pipes and ducts without the expense and complexity of traditional multipoint systems, and are well suited to most applications with limited available straight run.

The Master-Touch FAT™ probes utilize a flow averaging tube to give a stable flow signal in applications where the flow profile is less than ideal, such as downstream of a bend, valve, tee or obstruction. In most installations, the up-stream straight run can be as short as three diameters. The FAT™ probe has a number of large diameter (0.125") inlet ports along the length of the upstream impact surface. The impact pressure at each inlet port is averaged inside the tube to create the axial flow through the tube and across our flow sensor. The gas returns to the main flow stream through the ports located near the sensing elements.

Anomalies in the actual flow profile or installations in non-circular ducts may require minor adjustments for the best accuracy. The velocity impact pressure follows a square root function. Therefore, the average velocity pressure in the FAT™ probe may vary slightly from the average of the velocities at each inlet port. The Master-Touch software supports three methods of flow signal adjustments for superior accuracy.

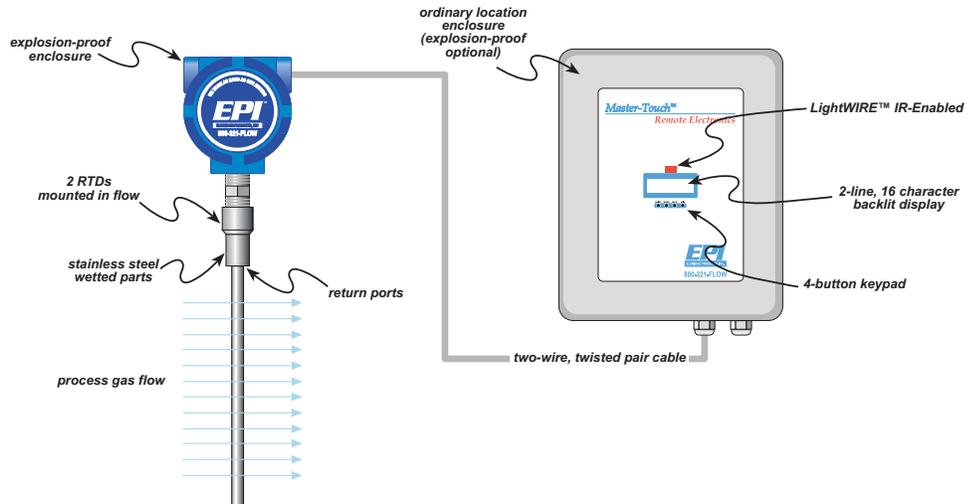

INSERTION style Flow Averaging Tubes include an inlet probe assembly which is inserted into the process gas flow conduit to allow the gas to flow into the tube and up across the flow sensing elements before returning to the process line. Our insertion style flowmeters are available with 1/2", 3/4" or 1" OD inlet tubes (the flow return port is 1/2" larger for each size). Installation requires a properly-sized bored through tube fitting. Tube fittings and ball valve retractor assemblies, with or without a mounting flange, are also available from the factory as options. The tube length is determined by the pipe or duct ID upon ordering.

REMOTE style thermal mass flowmeters utilize two enclosures. One enclosure is mounted at the point of measurement — on the flow section or on the probe assembly. This enclosure may be rated for either hazardous environments or for ordinary, non-hazardous environments, as necessary. The second (remote) enclosure is usually placed in a readily accessible location rated for non-hazardous conditions. (Contact the factory for information concerning remote explosion-proof enclosure) The remote enclosure includes all of the electrical connections as well as the linearizing electronics and the display/keypad assembly. Only a two-wire, twisted-pair cable is required to carry the input power and flow signal between the two enclosures.

TYPICAL APPLICATIONS FOR MASTER-TOUCH™ FLOWMETERS:

AUTOMOTIVE INDUSTRY Compressed Air monitoring * Natural Gas consumption * Powder paint air flow
* Paint booth/paint oven ventilation

UTILITY SERVICES Stack or Flue Gas * Wastewater aeration * Ventilation systems * Digester Gas * Gas flows * Nitrogen purge * Combustion air * Boiler inlet air


FOOD PROCESSING Drying air * Ventilation systems * Boiler inlet air * Exhaust gas * Process control * Compressor lines * HVAC Air balancing * Duct flows * Energy conservation * Fume hoods * Cleanrooms * Laminar flow benches

LABORATORY AND R & D Flow research * Biomedical studies * University studies * Toxicology studies * Energy studies * Industrial Hygiene * Occupational Safety * Experimentation

PETROLEUM & GAS INDUSTRIES Custody transfer * Landfill Gas recovery * Flare Gas measurement * Gas mixing * Gas quality studies * Leak testing

RAW MATERIALS INDUSTRIES Pulp & Paper mills * Mining * Semiconductor manufacturing * Chemical processing * Primary metals * Plastics & synthetics

*U. S. Patent No. 6,883,389 Other U.S. & foreign patents pending

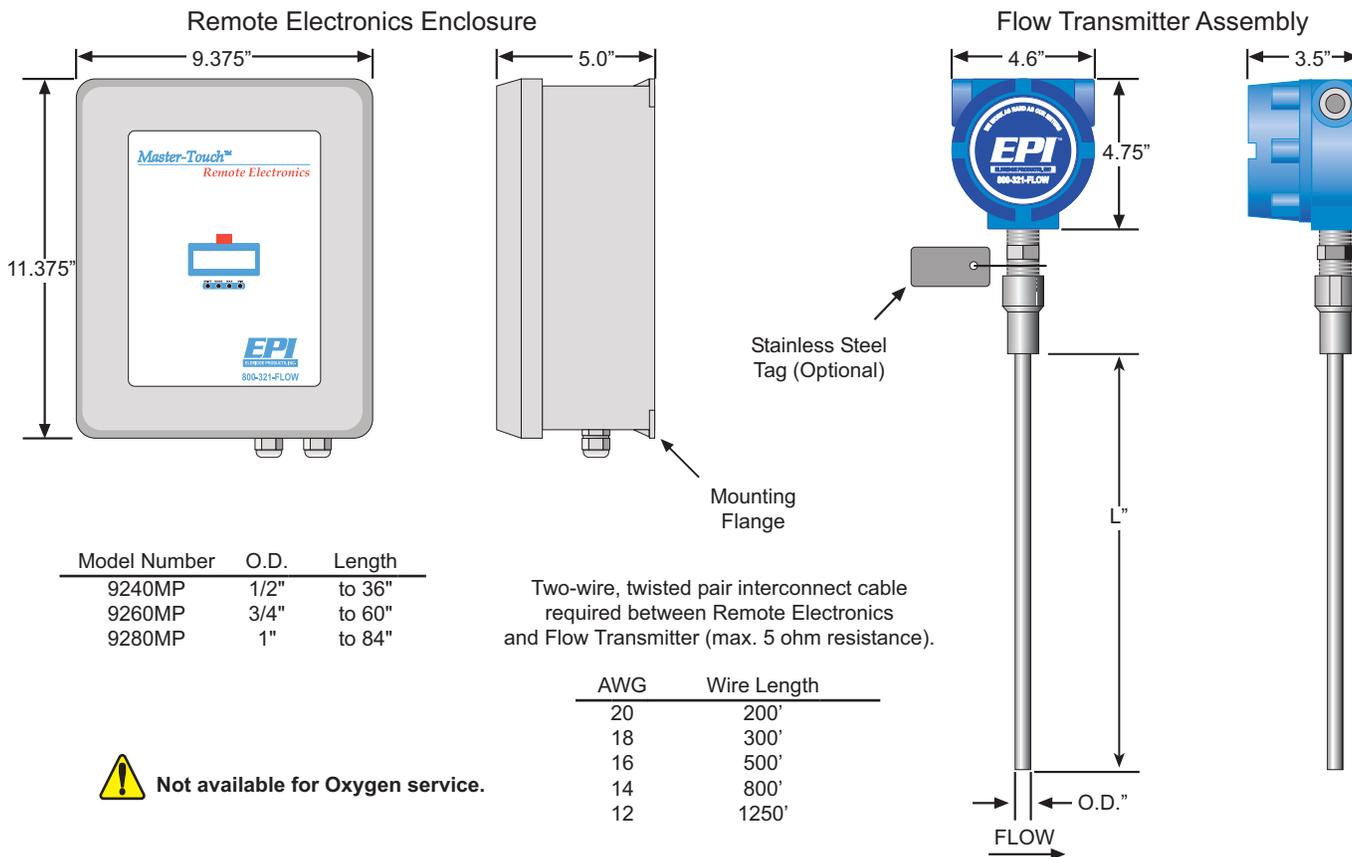

SPECIFICATIONS

Linear signal output	0-5 VDC & 4-20 mA
Relay Output	Two 1-amp, user-selectable alarm functions
Signal Interface	RS232 & RS485 Modbus RTU
Accuracy including linearity (Ref.: 21°C):	± (1% of Reading + [0.5% + .05%/°C of Full Scale])
Repeatability	± 0.2% of Full Scale
Sensor response time	1 second (time constant per step change)
Turn down ratio	100:1 (50 SCFM/FT2 minimum Reading)
Electronics temperature range	-40°-85°C (-40°-185°F)
Gas temperature range	0°-66°C (32°-150°F)
Gas temperature effect	0.02% /°C
Gas pressure effect	Negligible over +/- 20% of absolute calibration pressure
Pressure rating maximum:	
Insertion flowmeters (See note below)	225 PSI Std., >225 special
Insertion probe PSI assumes proper installation with stainless steel ferrule. Teflon ferrules are not acceptable. Above the listed pressure, flange-mounting is required to eliminate the potential of the probe being forced out of the line during installation or removal under pressure.	
Transmitter power requirements	5 Watts or less
RAM Back-up	Lithium Battery
Wetted materials:	316SS, including sensor
Standard temperature & pressure (STP)	70° F & 29.92" Hg
(Air .075 lb/cubic foot)	
NIST traceable calibration	Standard

APPROVALS

MP Series Flow Transmitter — For use in hazardous area locations: Class I Division 1 Groups B, C and D; Class II E, F and G; Class III; Type 4X; Ex d IIB + H2; AEx d IIB + H2, IP66; EEx d IIB + H2, IP66; T2 (consult factory for T3 or T4).

MP Series Remote Enclosure — For use in Ordinary (Non-Hazardous) area locations: Type 4X, IP66 Certified to US requirements; Certified to Canadian requirements

Certified to European ATEX requirements


* The accuracy specification applies to the instrument only. EPI is not responsible for measurement errors due to flow profile irregularities caused by installation piping configurations, corrosion on inner pipe surfaces, valve placement, etc.

ACCESSORIES



*Light*WIRE™

The LightWIRE™ Communicator I modules transmit and receive signals from LightWIREIR-Enabled flowmeters. When connected to a RS232 or USB port on a PC or laptop running EPI Communicator software, the LightWIRE Communicator I module replaces the three-wire cable for communications with an IR-Enabled Master-Touch™ flowmeter. The LightWIRE Communicator II hand-held module is a substitute for the keypad/display assembly of IR-Enabled Master-Touch™ flowmeters. Access all of the flowmeters functions without removing the flowmeter's enclosure cover with the Communicator II module.

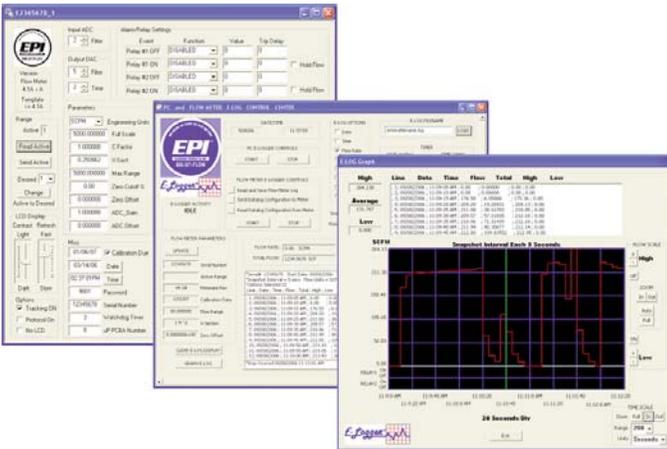

E-logger™

The E-Logger™ module of the free EPICommunicator™ software is a fully functional, PC-based data logger that works in conjunction with Master-Touch™ flowmeters which have v4.1A or higher software. The user can select from a set of categories for the data collection, the time interval for each data "snapshot" and, if necessary, programmed start and stop times. The data is stored on either the flowmeter or a PC. E-Logger will also graph the data, and it provides tools for analysis of the data. Data files stored on a PC can be accessed by most common spreadsheet applications.

LIMITED WARRANTY

Eldridge Products, Inc. (EPI) warrants its products to be free from defects in materials and workmanship for one year from the date of factory shipment. If there is a defect, the purchaser must notify EPI of the defect within the warranty period. Upon receipt of the defective product, EPI will either repair or replace the defective product at its sole option and at no cost to the purchaser. EPI MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AS TO THE PRODUCTS. EPI MAKES NO WARRANTY THAT THE GOODS SOLD TO ANY PURCHASER ARE FIT FOR ANY PARTICULAR PURPOSE. FURTHERMORE, EPI MAKES NO WARRANTY OF MERCHANTABILITY WITH RESPECT TO ANY PRODUCTS SOLD TO ANY PURCHASERS. There are no other warranties that extend beyond the description on any brochure or price quote.

LIMITED ACCEPTANCE

Acceptance of any offer is limited to its terms. Acceptances or confirmations that state additional or differing terms from this price quote shall be operative as acceptances, but all additional or differing terms shall be deemed material alterations within the meaning of Commercial Code Section 2207(2)(b), and notice of objection to them pursuant to Commercial Code Section 2207(2)(c) is hereby given. The laws of the State of California govern this contract and venue is Monterey County. Risk of loss passes F.O.B. EPI factory. Payment due in full in US Dollars within credit terms granted from factory shipment. Additional fees shall include interest on unpaid balances that are outstanding for more than granted credit terms, plus all collection costs and attorneys' fees incurred in collecting any outstanding balance. Any and all additional or differing terms do not become part of the contract between EPI and any purchaser. The terms of any offer are expressly limited to the terms detailed in any product brochure or price quote. Any modification to any of the terms of this offer must be in writing and must be signed by an officer of EPI.



Eldridge Products, Inc.

2700 Garden Road, Building A, Monterey, CA 93940
TF: 800.321.FLOW (3569) PH: 831.647.7777 FX: 831.648.7780
www.epiflow.com — sales@epiflow.com

Eldridge Products, Inc.

Gas Mass Flow Measurement & Control Instrumentation

Master-Touch™




Series 9100MP Flow Averaging Tubes



Eldridge Products, Inc.'s patented* Flow Averaging Tubes (FAT™) provide accurate flow measurement in large pipes and ducts without the expense and complexity of traditional multipoint systems, and are well suited to most applications with limited available straight run.

The Master-Touch FAT™ probes utilize a flow averaging tube to give a stable flow signal in applications where the flow profile is less than ideal, such as downstream of a bend, valve, tee or obstruction. In most installations, the up-stream straight run can be as short as three diameters. The FAT™ probe has a number of large diameter (0.125") inlet ports along the length of the upstream impact surface. The impact pressure at each inlet port is averaged inside the tube to create the axial flow through the tube and across our flow sensor. The gas returns to the main flow stream through the ports located near the sensing elements.

Anomalies in the actual flow profile or installations in non-circular ducts may require minor adjustments for the best accuracy. The velocity impact pressure follows a square root function. Therefore, the average velocity pressure in the FAT™ probe may vary slightly from the average of the velocities at each inlet port. The Master-Touch software supports three methods of flow signal adjustments for superior accuracy.

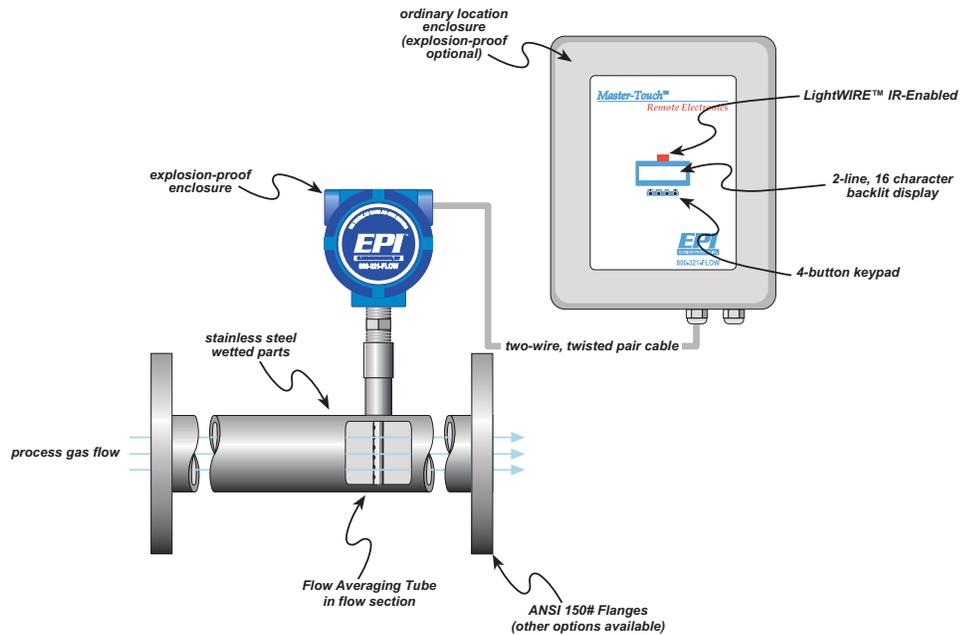

INLINE style thermal Flow Averaging Tubes have a flow section that is usually specified to match the user's flow conduit. It is plumbed directly into the process line. The standard design includes ANSI 150 # flanges and our flow straightening plates. Upstream straight run requirements can be reduced to a little as three diameters with this design. Our Inline style Flow Averaging Tubes are available in sizes from 2" pipe through 6" pipe (consult factory for larger sizes).

REMOTE style thermal mass flowmeters utilize two enclosures. One enclosure is mounted at the point of measurement — on the flow section or on the probe assembly. This enclosure may be rated for either hazardous environments or for ordinary, non-hazardous environments, as necessary. The second (remote) enclosure is usually placed in a readily accessible location rated for non-hazardous conditions. (Contact the factory for information concerning remote explosion-proof enclosure) The remote enclosure includes the all of the electrical connections as well as the linearizing electronics and the display/keypad assembly. Only a two-wire, twisted-pair cable is required to carry the input power and flow signal between the two enclosures.

TYPICAL APPLICATIONS FOR MASTER-TOUCH™ FLOWMETERS:

AUTOMOTIVE INDUSTRY Compressed Air monitoring * Natural Gas consumption * Powder paint air flow
* Paint booth/paint oven ventilation

UTILITY SERVICES Stack or Flue Gas * Wastewater aeration * Ventilation systems * Digester Gas * Gas flows * Nitrogen purge * Combustion air * Boiler inlet air



FOOD PROCESSING Drying air * Ventilation systems * Boiler inlet air * Exhaust gas * Process control * Compressor lines * HVAC Air balancing * Duct flows * Energy conservation * Fume hoods * Cleanrooms * Laminar flow benches

LABORATORY AND R & D Flow research * Biomedical studies * University studies * Toxicology studies * Energy studies * Industrial Hygiene * Occupational Safety * Experimentation

PETROLEUM & GAS INDUSTRIES Custody transfer * Landfill Gas recovery * Flare Gas measurement * Gas mixing * Gas quality studies * Leak testing

RAW MATERIALS INDUSTRIES Pulp & Paper mills * Mining * Semiconductor manufacturing * Chemical processing * Primary metals * Plastics & synthetics

* U. S. Patent No. 6,883,389 Other U.S. & foreign patents pending

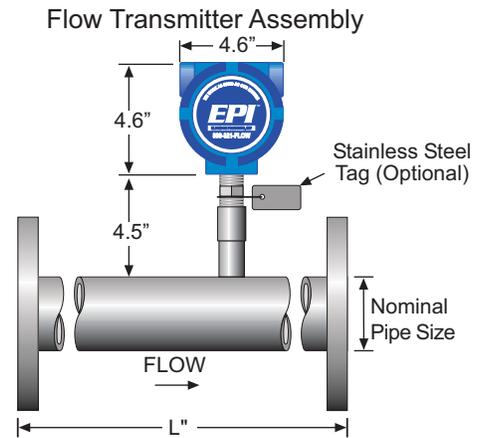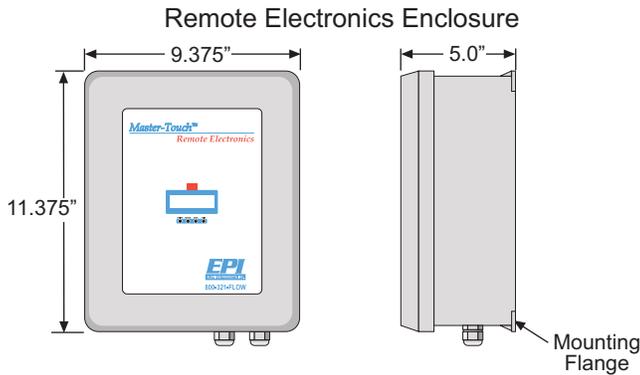


Model Number	Pipe	Length*
9116MP	2"	14"
9120MP	2 1/2"	14"
9124MP	3"	14"
9132MP	4"	14"
9148MP	6"	14"

* Consult factory for special lengths

Two-wire, twisted pair interconnect cable required between Remote Electronics and Flow Transmitter (max. 5 ohm resistance).

AWG	Wire Length
20	200'
18	300'
16	500'
14	800'
12	1250'

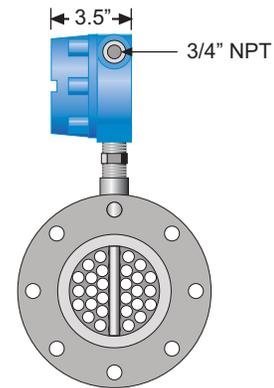

Not available for Oxygen service.

SPECIFICATIONS

Linear signal output
 Relay Output
 Signal Interface
 Accuracy including linearity (Ref.: 21°C):
 Repeatability
 Sensor response time
 Turn down ratio
 Electronics temperature range
 Gas temperature range
 Gas temperature effect
 Gas pressure effect
 Pressure rating maximum:
 Inline flowmeters
 Transmitter power requirements
 RAM Back-up
 Wetted materials:
 Standard temperature & pressure (STP)
 (Air .075 lb/cubic foot)
 NIST traceable calibration

0-5 VDC & 4-20 mA
 Two 1-amp, user-selectable alarm functions
 RS232 & RS485 Modbus RTU
 $\pm (1\% \text{ of Reading} + (0.5\% + .05\% / ^\circ\text{C} \text{ of Full Scale}))$
 $\pm 0.2\% \text{ of Full Scale}$
 1 second (time constant per step change)
 100:1 (50 SCFM/FT² minimum Reading)
 -40°-85°C (-40°-185°F)
 0°-66°C (32°-150°F)
 0.02% / °C
 Negligible over +/- 20% of absolute calibration pressure
 500 PSI Std., >500 special
 5 Watts or less
 Lithium Battery
 316SS, including sensor
 70° F & 29.92" Hg
 Standard

APPROVALS

MP Series Flow Transmitter — For use in hazardous area locations: Class I Division 1 Groups B, C and D; Class II E, F and G; Class III; Type 4X; Ex d IIB + H2; AEx d IIB + H2, IP66; EEx d IIB + H2, IP66; T2 (consult factory for T3 or T4).

MP Series Remote Enclosure — For use in Ordinary (Non-Hazardous) area locations: Type 4X, IP66

Certified to US requirements; Certified to Canadian requirements

Certified to European ATEX requirements


* The accuracy specification applies to the instrument only. EPI is not responsible for measurement errors due to flow profile irregularities caused by installation piping configurations, corrosion on inner pipe surfaces, valve placement, etc.

ACCESSORIES



Light **WIRE™**

The LightWIRE™ Communicator I modules transmit and receive signals from LightWIREIR-Enabled flowmeters. When connected to a RS232 or USB port on a PC or laptop running EPI Communicator software, the LightWIRE Communicator I module replaces the three-wire cable for communications with an IR-Enabled Master-Touch™ flowmeter. The LightWIRE Communicator II hand-held module is a substitute for the keypad/display assembly of IR-Enabled Master-Touch™ flowmeters. Access all of the flowmeters functions without removing the flowmeter's enclosure cover with the Communicator II module.

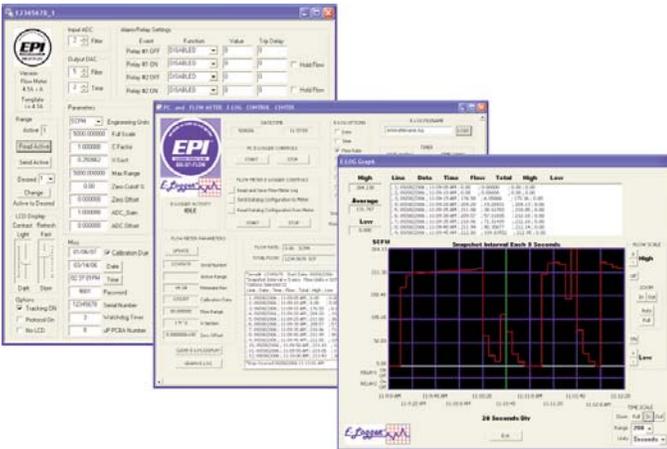

E-Logger™

The E-Logger™ module of the free EPICommunicator™ software is a fully functional, PC-based data logger that works in conjunction with

Master-Touch™ flowmeters which have v4.1A or higher software. The user can select from a set of categories for the data collection, the time interval for each data "snapshot" and, if necessary, programmed start and stop times. The data is stored on either the flowmeter or a PC. E-Logger will also graph the data, and it provides tools for analysis of the data. Data files stored on a PC can be accessed by most common spreadsheet applications.

LIMITED WARRANTY

Eldridge Products, Inc. (EPI) warrants its products to be free from defects in materials and workmanship for one year from the date of factory shipment. If there is a defect, the purchaser must notify EPI of the defect within the warranty period. Upon receipt of the defective product, EPI will either repair or replace the defective product at its sole option and at no cost to the purchaser. EPI MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AS TO THE PRODUCTS. EPI MAKES NO WARRANTY THAT THE GOODS SOLD TO ANY PURCHASER ARE FIT FOR ANY PARTICULAR PURPOSE. FURTHERMORE, EPI MAKES NO WARRANTY OF MERCHANTABILITY WITH RESPECT TO ANY PRODUCTS SOLD TO ANY PURCHASERS. There are no other warranties that extend beyond the description on any brochure or price quote.

LIMITED ACCEPTANCE

Acceptance of any offer is limited to its terms. Acceptances or confirmations that state additional or differing terms from this price quote shall be operative as acceptances, but all additional or differing terms shall be deemed material alterations within the meaning of Commercial Code Section 2207(2)(b), and notice of objection to them pursuant to Commercial Code Section 2207(2)(c) is hereby given. The laws of the State of California govern this contract and venue is Monterey County. Risk of loss passes F.O.B. EPI factory. Payment due in full in US Dollars within credit terms granted from factory shipment. Additional fees shall include interest on unpaid balances that are outstanding for more than granted credit terms, plus all collection costs and attorneys' fees incurred in collecting any outstanding balance. Any and all additional or differing terms do not become part of the contract between EPI and any purchaser. The terms of any offer are expressly limited to the terms detailed in any product brochure or price quote. Any modification to any of the terms of this offer must be in writing and must be signed by an officer of EPI.



Eldridge Products, Inc.

2700 Garden Road, Building A, Monterey, CA 93940
TF: 800.321.FLOW (3569) PH: 831.647.7777 FX: 831.648.7780
www.epiflow.com — sales@epiflow.com